



SIGNATURE SERIES SIII-1065W

D-Frame 2.0 Exclusively Transparent Power Supply



Air-Cooled Engine with Aluminium Alloy Top Cover

Continuing with the D-Frame 2.0 design, the SIII-1065W power supply is designed in the shape of an air-cooled engine with an aluminium alloy top cover. Its reflective tempered glass window emits light from within to create a stunning visual impact. The original power supply design, combined with high wattage, excellent heat dissipation and fast charging, provides gamers with the ultimate powerful performance.

Four Timed Extra Power Modes

The SIII-1065 power supply provides options to efficiently remove the residual hot air generated by the operating PC. To accomplish this task, the PSU emits 65W electricity to keep the cooling system operational after shutting down the PC. Users can choose the timer options to be continuous, after 180 seconds, after 30 seconds or immediately shut down.




Lighting Power Button

USB Intelligent Fast Charge



USB Intelligent Fast Charge

The designed USB internal is ideal for your mobile phone and tablet charging, moreover with the automatic identify charging system, you can charge your gadgets without turning your system on. It outputs to maximum 3A and supports APPLE 2.4 A, Samsung 2.0A fast charge. Match the BC 1.2 & YD/T 1591 USB charging regulation.

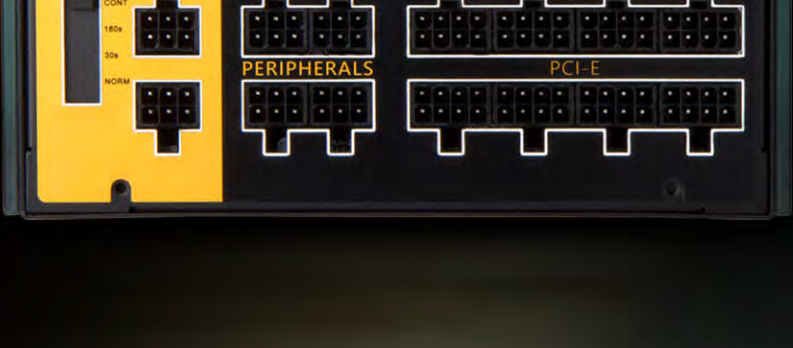

Fully Modular Cables for Quick and Easy Installation

Fully modular flat cable design simplifies installation and allows you to use only the cables you need, for a neater, cleaner build.

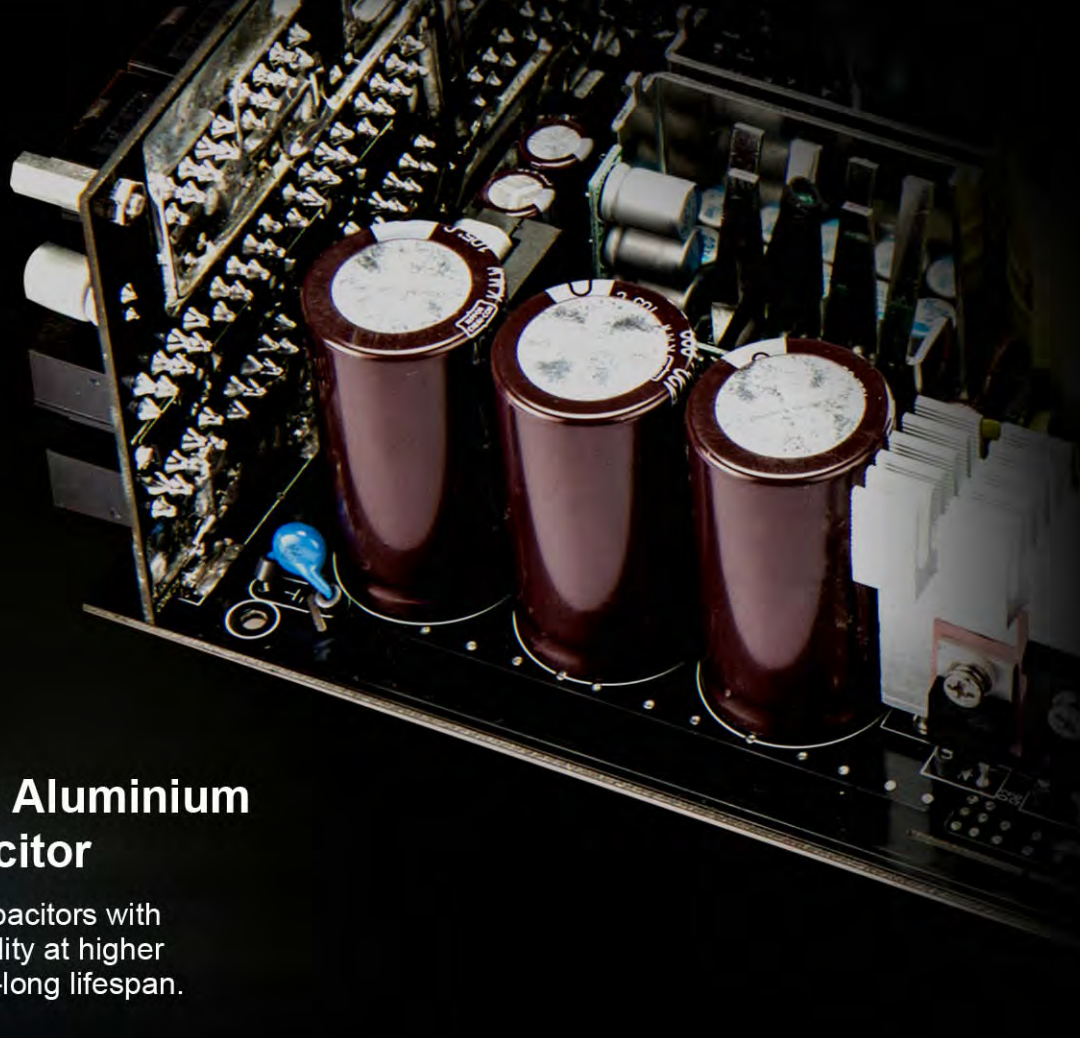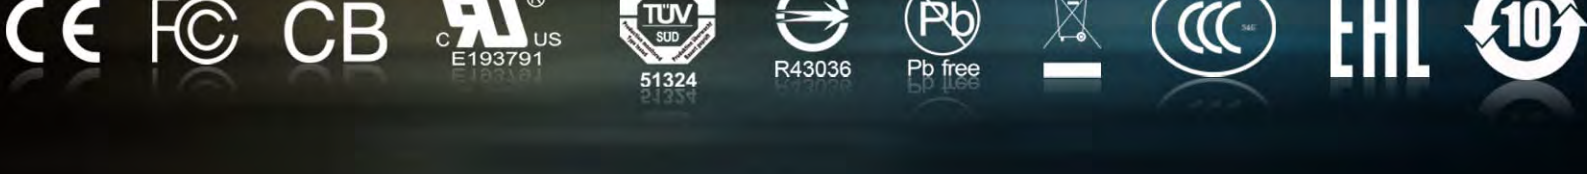

Highly Reliable Japanese Aluminium Electrolytic Capacitor


Premium Japanese electrolytic capacitors with 105°C rating improves power stability at higher temperatures and provides an ultra-long lifespan.



Industry's First 165mm Silent Fan

SIII-1065W comes with 165mm quiet cooling fan. The ceramic shaft design is abrasion resistant, silent and long life, providing users with low noise and high dissipation solution.

Fan Noise of the Power Supply

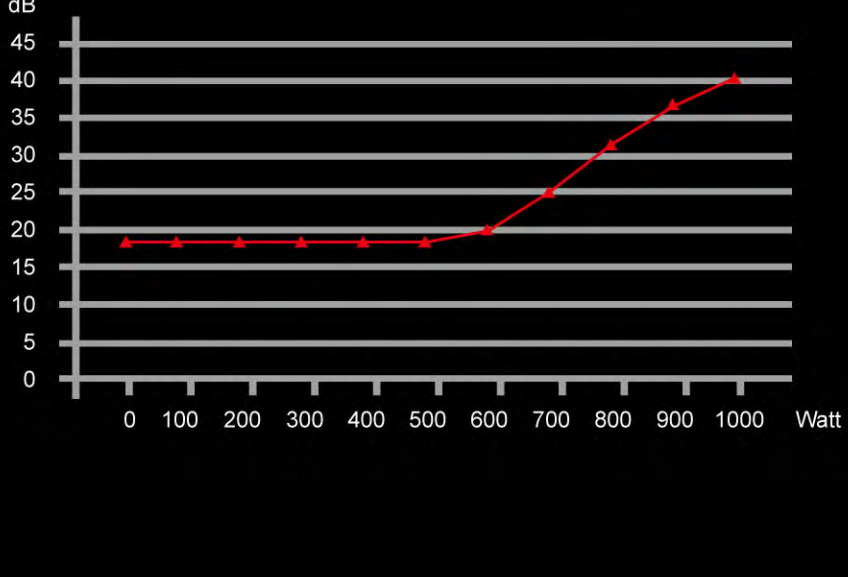

CABLE INFORMATION

Connector	Quantity	Length
24 Pin Motherboard	1	650 mm
8 (4+4) Pin CPU	2	850 mm
8 (6+2) Pin PCI-E	8	600 mm
90 Degrees SATA	1	700 mm (50mm x 50mm x 50mm)
SATA	2	600 mm (100mm x 100mm)
4 Pin Peripheral 4 Pin FDD	3	600 mm (100mm x 100mm x 100mm)

SPECIFICATIONS

* In Win products comply with RoHS regulations
* Specifications may vary based on different regions

Model	Signature Series SIII-1065W										
Total Power	1065W										
ATX/EPS Version	ATX12V V2.4 / EPS12V V2.92										
Cable Management	Fully Modular										
PFC	Active PFC (>0.9)										
MTBF (Hours)	>100,000										
AC Input	100 - 240Vac. 6.5-13A 50-60Hz										
Hold-up time (ms)	>16ms										
Fan	165mm Silent Fan										
Fan Size	165mm*25mm										
Typical Fan Noise(dB)	< 25dB										
Full Protection	OCP/OVP/UVP/SCP/OTP/OPP										
Safety Certifications	cTUVus / TUV / CB / BSMI / CE / FCC / EAC / CCC / RCM/KC										
Dimensions (L x W x D)	210 x 180 x 96mm										
Weight	3.1kg										
Warranty	5 Years										

Model	Max. Output Current										USB	EXTRA POWER
	+12V1	+12V2	+12V3	+5V	+3.3V	-12V	+5VSB	MAX1	MAX2	MAX3		
SIII-1065W	25A	25A	75A	24A	24A	0.3A	6A	125W	1000W	1650W	3A	5.4A

*MAX1: +3.3V & +5V Total Output / MAX2: +12V Total Output / MAX3: Total Output Power

